



Non-road Mobile Machinery in Service Monitoring Based on PEMS

JRC Experiences in the Development of the Regulatory Proposal

Roberto Gioria – European Commission

PEMS 11th Annual Conference

March 17th, 2022

NRMM emission regulations: Background

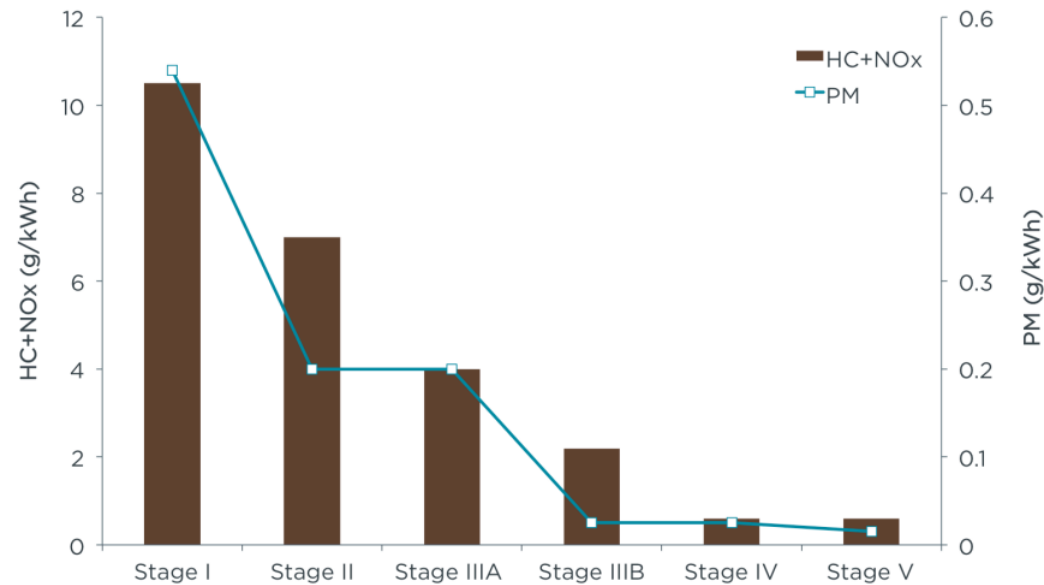


Figure 1. Emission limits from Stage I to Stage V for HC + NOx and PM

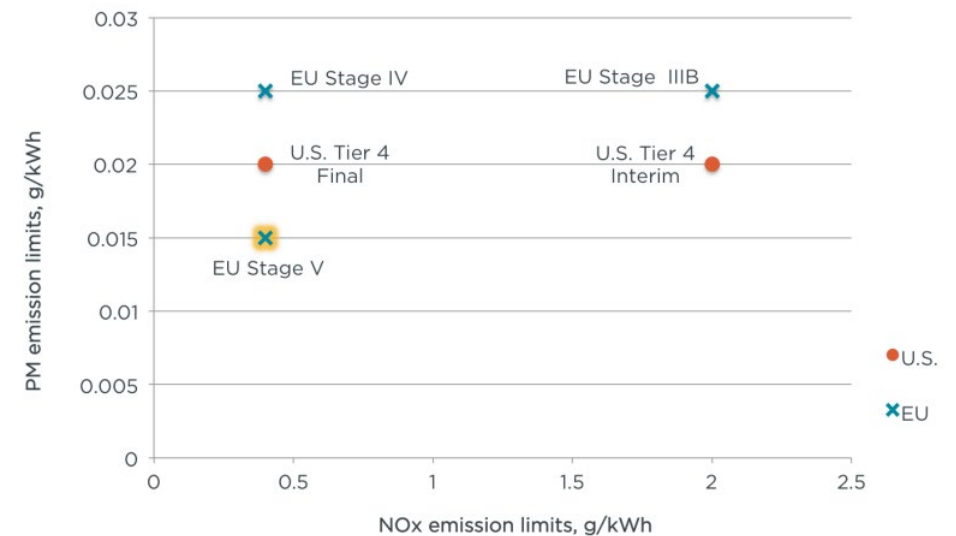



Figure 2. Comparison of PM and NOx emission limits between the U.S. and EU

- EU has adopted seven directives (six different emission stages)
- The current STAGE V is laid down in Regulation (EU) 2016/1628
- Stricter limits on emissions of NOx and PM
- PN emission limit introduced for certain engine groups.

• Source: ICCT, 2016

NRMM Stage V: Scope of application

- The regulation places all the engines in STAGE V. Each engine category must comply with a given set of emission limits.
- Strive alignment with (higher) US EPA standards, where appropriate
- Align the emission limits, where possible, to those in the on-road sector.

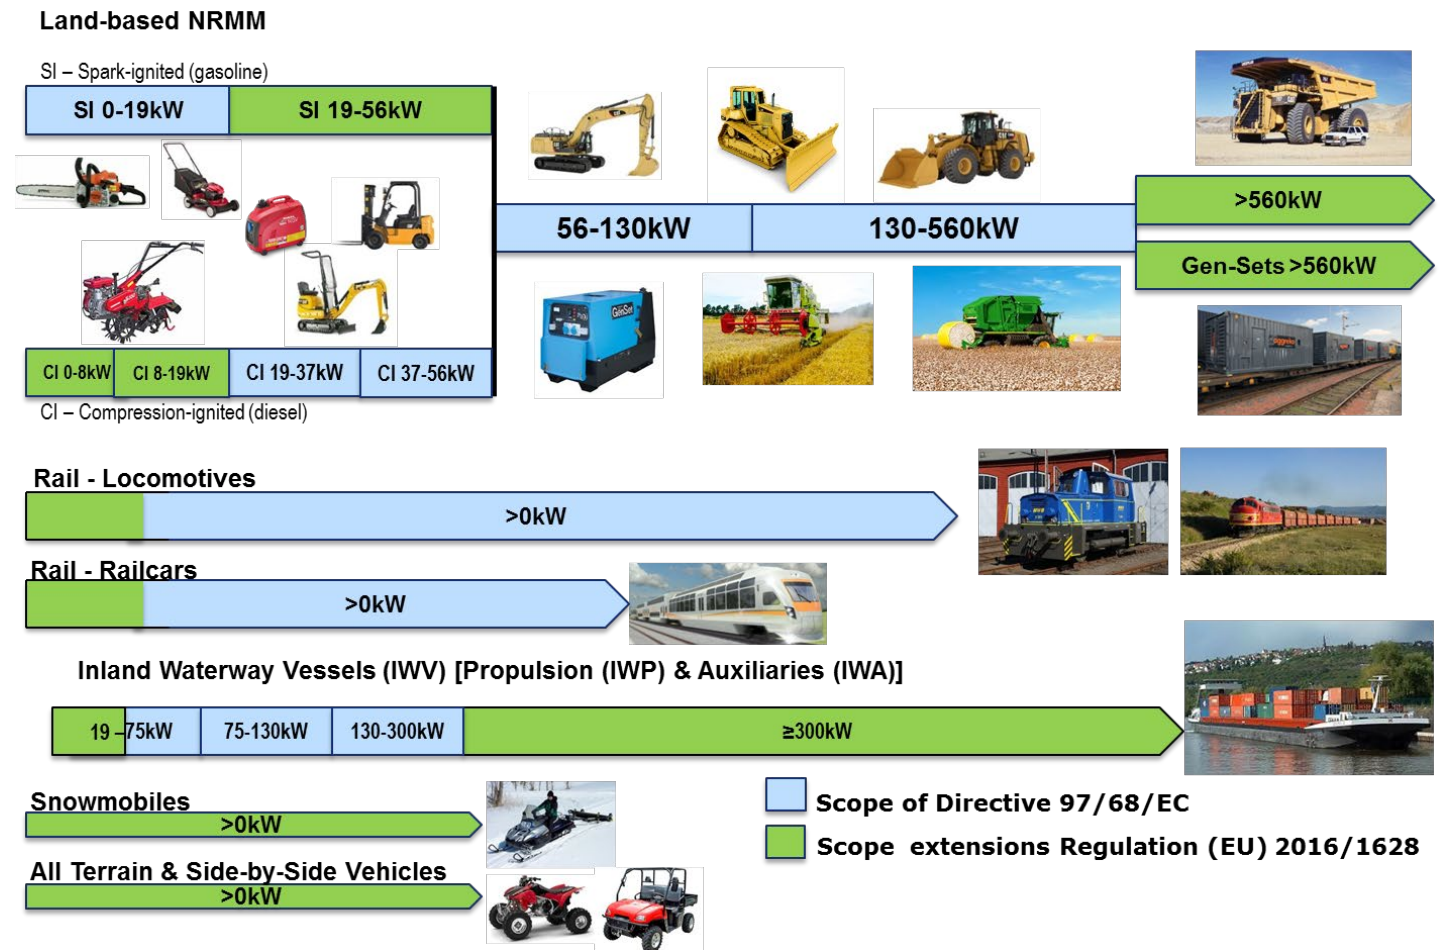

NRMM Stage V: New elements

- Introduced PN emission limit of $1 \cdot 10^{12}$ #/kWh for:
 - NRE ($19 \text{ kW} \leq P \leq 560 \text{ kW}$), IWP ($P \geq 300 \text{ kW}$), IWA ($P \geq 300 \text{ kW}$), RLR (all)



- Monitoring of emissions of in-service engines (all engines)*
 - Exploratory programme on measurement of gaseous emissions of variable speed engines of categories NRE-v-5 and NRE-v-6 (56 to 560 kW)**
 - Pilot Programmes for definition of procedures for all other categories

* Art. 19 of Regulation (EU) 2016/1628

** Regulation (EU) 2017/655



Monitoring of emissions of in-service NRMM engines (ISM)*

Goals

- To define the compliance limits for pollutant emissions of engine types or engine families during in-service operations: the so-called in-service conformity (ISC); and
- to ensure that the designed procedure, which is based on a reduced set of data, is appropriate to guarantee the limitation of the emissions of engines installed in NRMM over their normal operation.

Status

- Pilot programs were carried out on the categories that could have represented the major issues and uncertainties (applicability and suitability)


* *Regulation (EU) 2017/655*

ISM procedure (Engines $56 \text{ kW} \leq P \leq 560 \text{ kW}$)

- The procedure has already been explored with success to monitor the gaseous pollutant emissions from variable speed engines in the 56 kW to 560 kW power range (engines of categories NRE-v-5 and NRE-v-6).
- In literature, it is possible to find different reports* that evidenced that approach is feasible (the procedure and the relative prescriptions work very well for these engine categories) .

In particular, TNO concluded that:

“A Stage V engine equipped with SCR, as used on a drilling rig, is very clean as well. This indicates that the Stage V limit for stationary engines and the emissions abatement technology SCR can be very effective.”

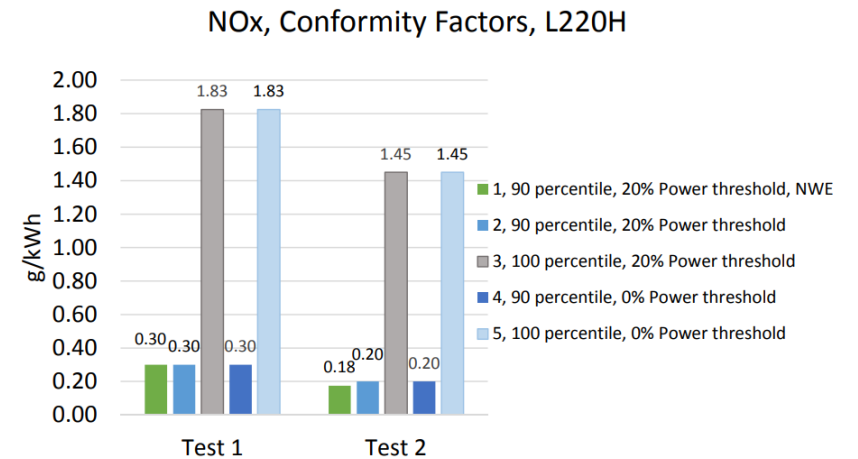

* Literature examples:

- a) Test Report OMT 4005 (2015), On-board Emission Measurement on Wheel Loaders with Different Emission Standards, Sweden, AVL MTC.
- b) Test Report OMT 5005 (2016), On-board Emission Measurement on Wheel Loaders in Different Test Cycles, Sweden, AVL MTC.
- c) Test Report R10221 (2021), Real-world emissions of non-road mobile machinery, TNO.

Monitoring of emissions of in-service NRMM engines (ISM) - Methodology

Engines of Categories NRE-v-1, NRE-v-2, NRE-c-1, NRE-c-2 (CI engines $P < 19\text{kW}$)



Engines of Categories ATS •




Engines of Categories SMB



- Test procedure is applicable to gaseous emissions of variable and constant speed engines;
- Compulsory use of PEMS (Portable Emission Measurement System) measuring NO_x, HC, CO and CO₂ (testing in engine-dyno is allowed in some circumstances/categories);
- Data Evaluation: Calculating process based on sub-sets (or 'windows') using the so called "Averaging window approach" WBW and CO₂-BW

Monitoring of emissions of in-service NRMM engines (ISM)

ISM engine groups

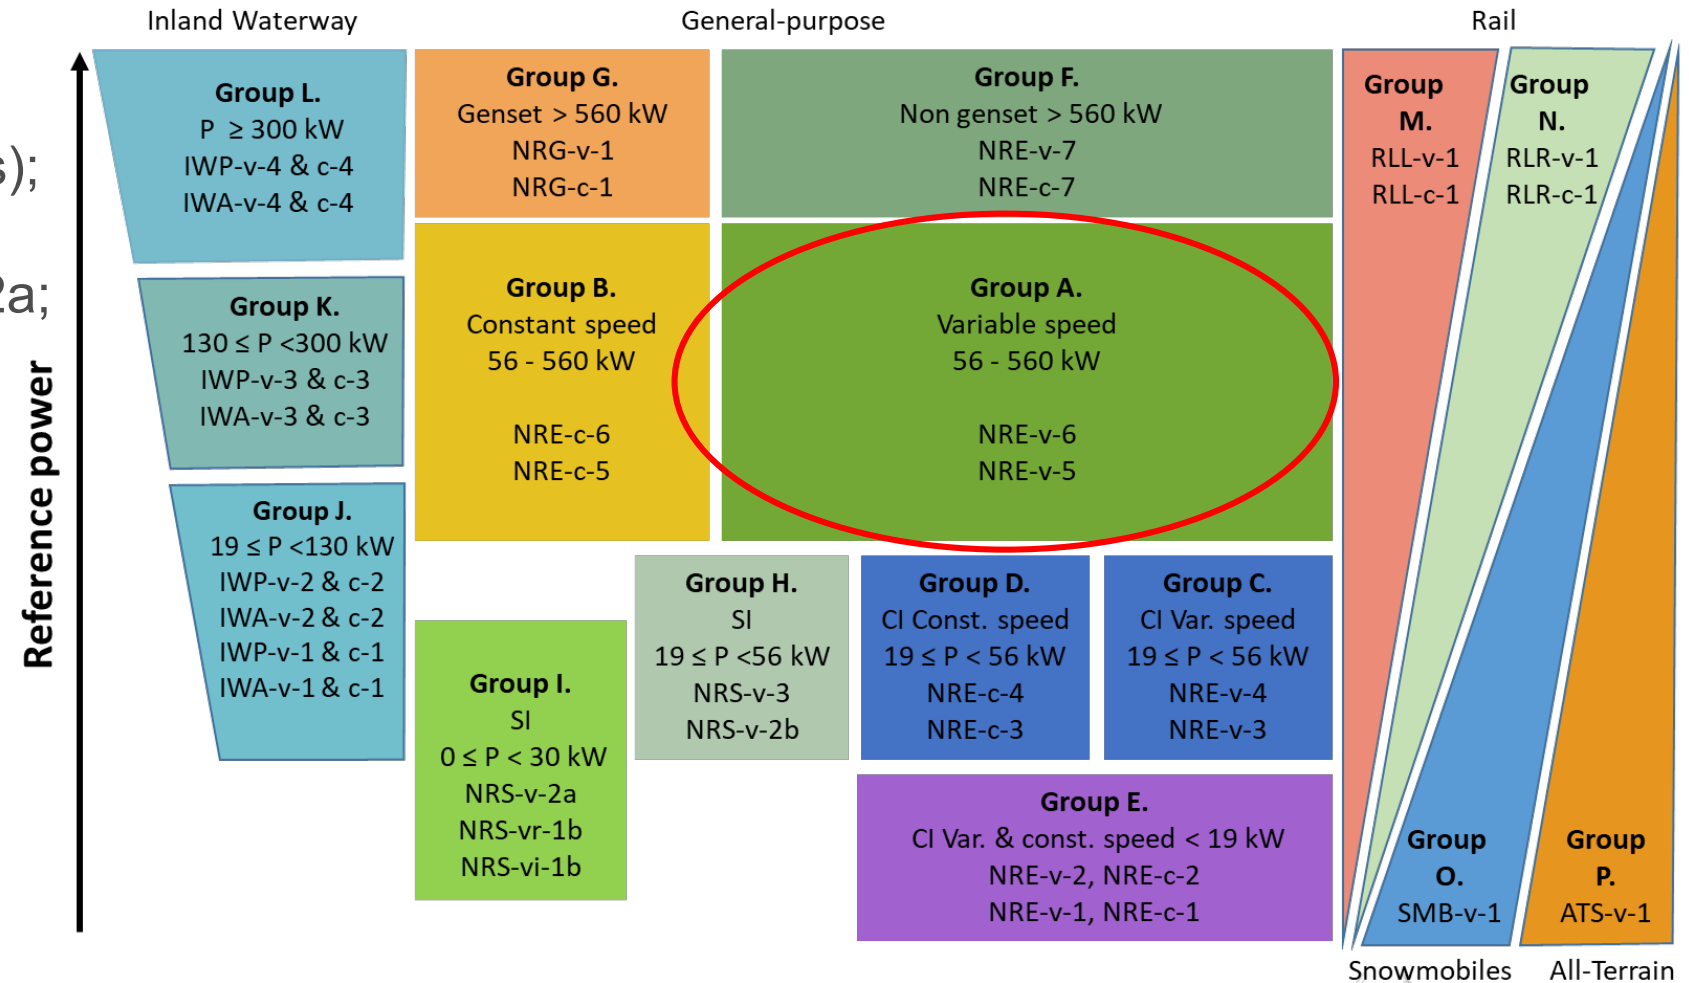

- NRE & NRG (all sub-categories);
- NRS-vr-1b, NRS-vi-1b, NRS-v-2a; NRS-v-2b & NRS-v-3;
- IWP & IWA (all sub-categories),
- RLL & RLR (all sub-categories)
- Snowmobiles (SMB-v-1)
- All-Terrain Vehicles (ATS-v-1)

ISM procedure main adaptations (**for** no ECU engines)

- NRE v 5/6 ($56 \leq P \leq 560$ kW) (**ECU**)

- ATS, SMB, NRE v/c 1,2 (**NO ECU**)

Reference magnitudes

- Reference magnitude (WORK & CO₂) is obtained at the applicable test cycles (Hot-start NRTC)




Determination of gaseous pollutant emissions and CF

- ISM engine data evaluation: WMAW & CO₂MAW





Working not working events (Marking algorithm)


- Based on POWER calculated from ECU signals




- Reference magnitude (CO₂) is obtained at the applicable STEADY test cycles (NRSC only)

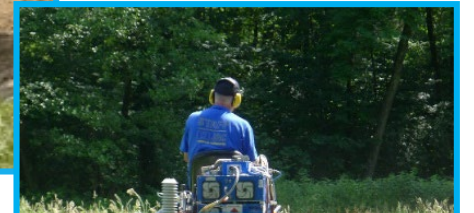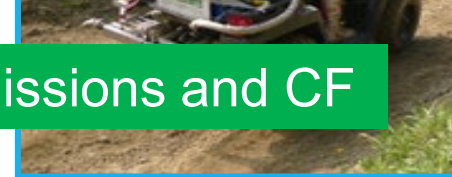

- ISM engine data evaluation: only CO₂MAW






- Based on POWER EQUIVALENT calculated from PEMS CO₂ signal (VELINE method)



ISM: VELINE method validation (SMB example)

- SMB data
- Engine:
 - 3 cylinders (4-stroke)
 - Gasoline
 - 900 cc - 68,9 kW

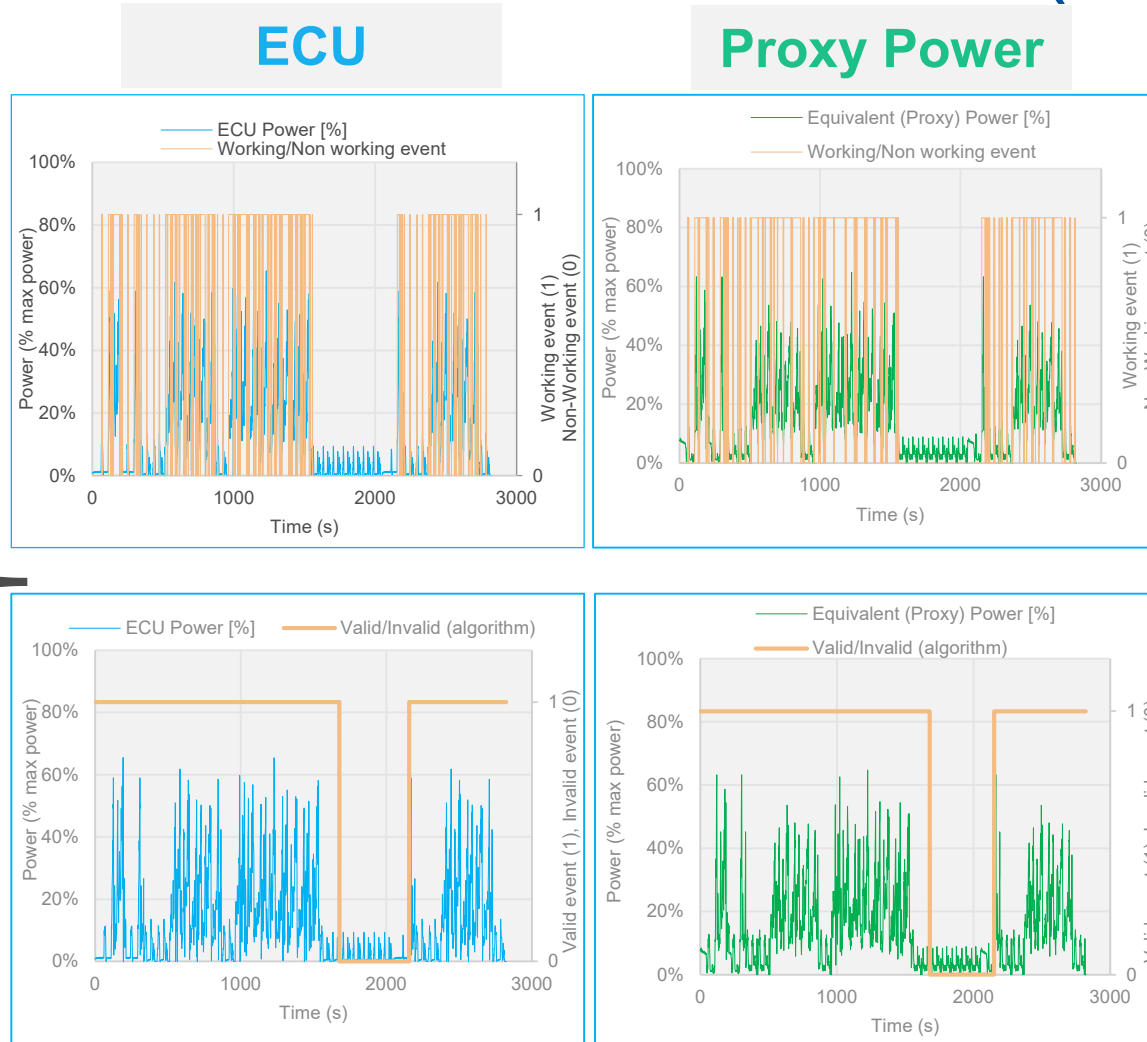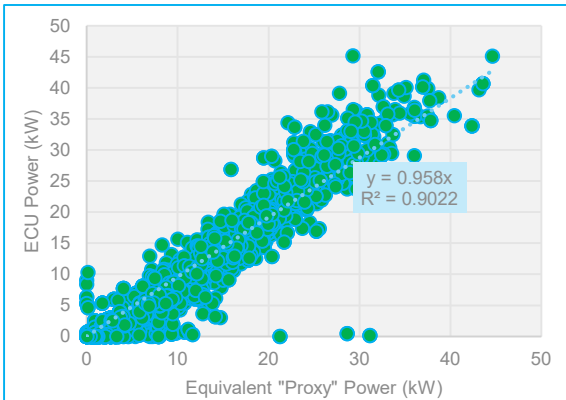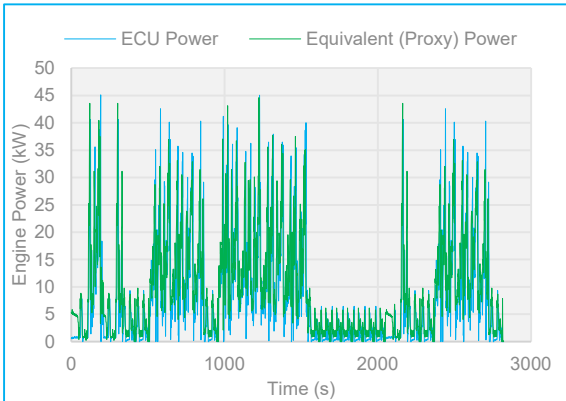

Working/Non Working event

ESCLUSION: BASELINE ($P < 10\% P_{max}$)	ECU MEASURED	CALCULATED
Total Number of events	2821	2821
Number of events with $P < 10\% P_{max}$	1657	1375
% of non-working events	58.74%	48.74%

Valid/Invalid (marking algorithm)

ESCLUSION: BASELINE ($P < 10\% P_{max}$) + WORKING/NOT WORKING EVENTS (D0/D1/D2/D3)	ECU MEASURED	CALCULATED
Total Number of events	2821	2821
Number of invalid events	477	471
% of invalid events	16.91%	16.70%





Main technical challenges & difficulties in NRMM ISM program

- PEMS mounting and operations
- Measurement of emissions: uncertainty in concentration.
- Measurement of emissions: uncertainty in mass emission (EFM measurement for single, 2/3 cylinders engines).
- ISM testing below 0°C – Ambient Temperature has a strong impact on battery duration (SMB).

PEMS mounting and operations – General provisions (no ECU engines)

- The installation and operation of the PEMS equipment have been more complicated than expected;
- Mechanical works necessary to safely installing the gas analyzer and the EFM;
- It is necessary to use a suitable coverage to protect the equipment from dust, water, shocks, etc.;

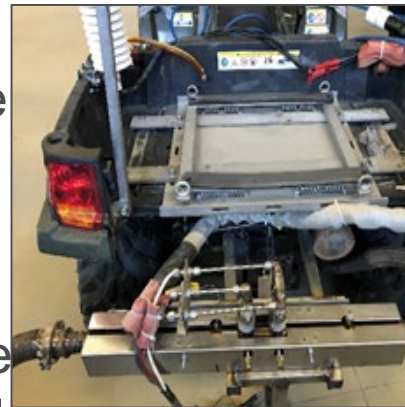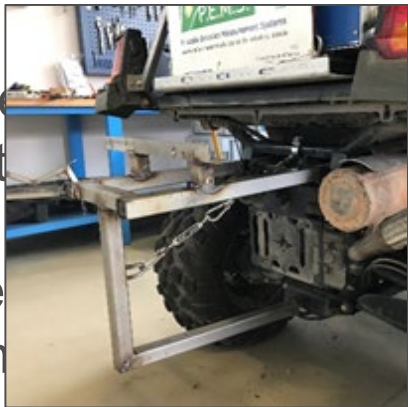


trrolley or an additional supporting vehicle in which allocate all the instrumentation.

PEMS mounting and operations – Special provisions (SMB)




- In the snowmobiles the exhaust exits is downward, close to snow surface. Indirect measurement of the exhaust mass flow is highly recommended (e.g. fuel flow rate and the carbon balance method).
- Installation of instruments on a sleigh able to adsorb the shocks (cushioned forks/dampers).
- The fuel must be conditioned to avoid condensation and freezing problem in the fuel flow measurement system.



• Photo courtesy of MTU

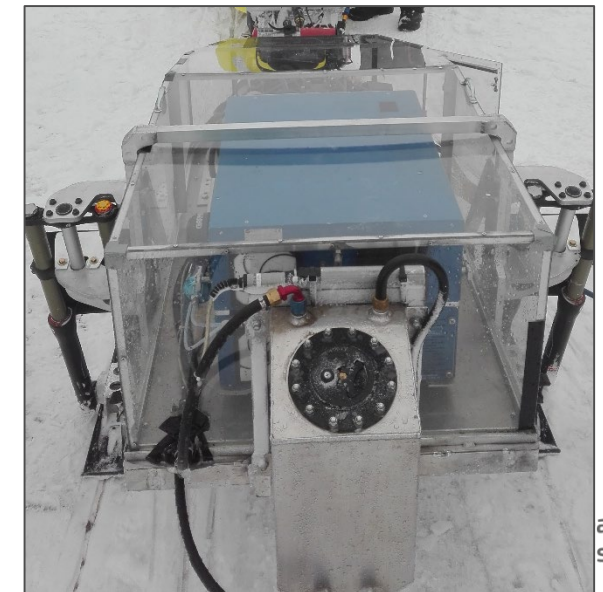

PEMS mounting and operations

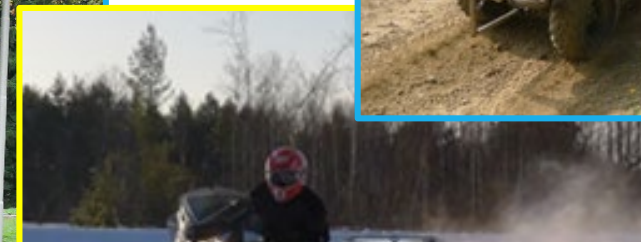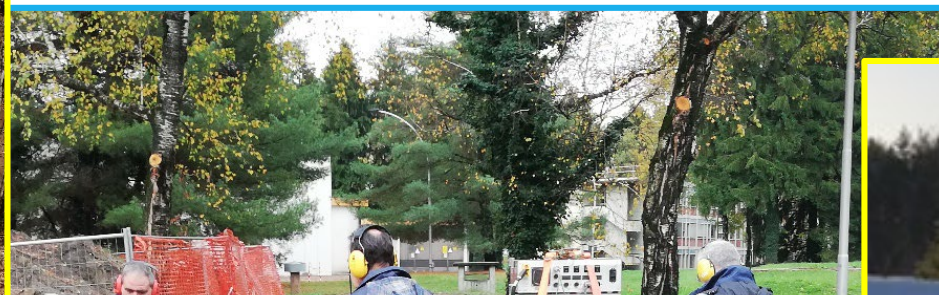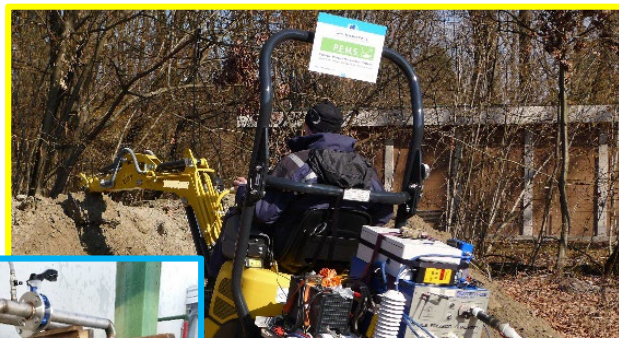



Yes, it is possible!



ISM challenges: Uncertainty in measurements



- Concentration

2-cyl (ATS - SbS)

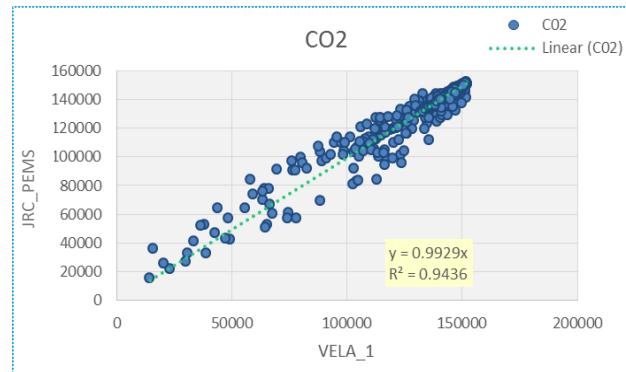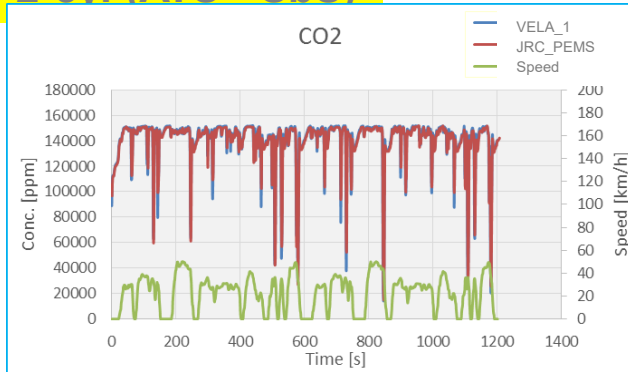

- Very good correlation between the laboratory-base analytical instruments and PEMS measurements.


3-cyl (NRE v2)

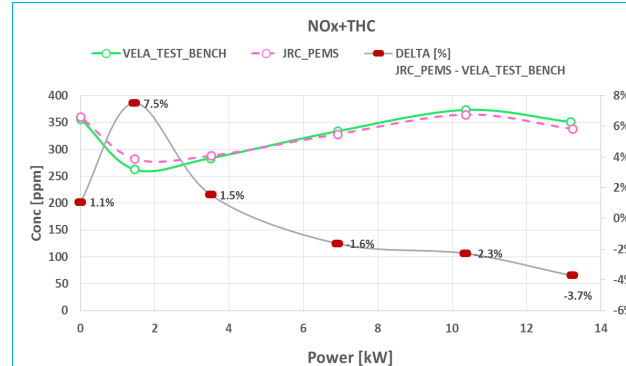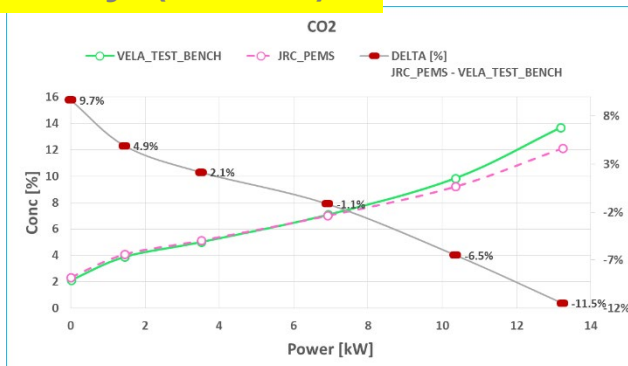

- Mass emissions

- It is governed by the uncertainty EFM.
- Mono and bi-cylinder engines are prone to pulsations.
- The use of a higher data acquisition velocity EFM is recommended.**

3-cyl (NRE v2)

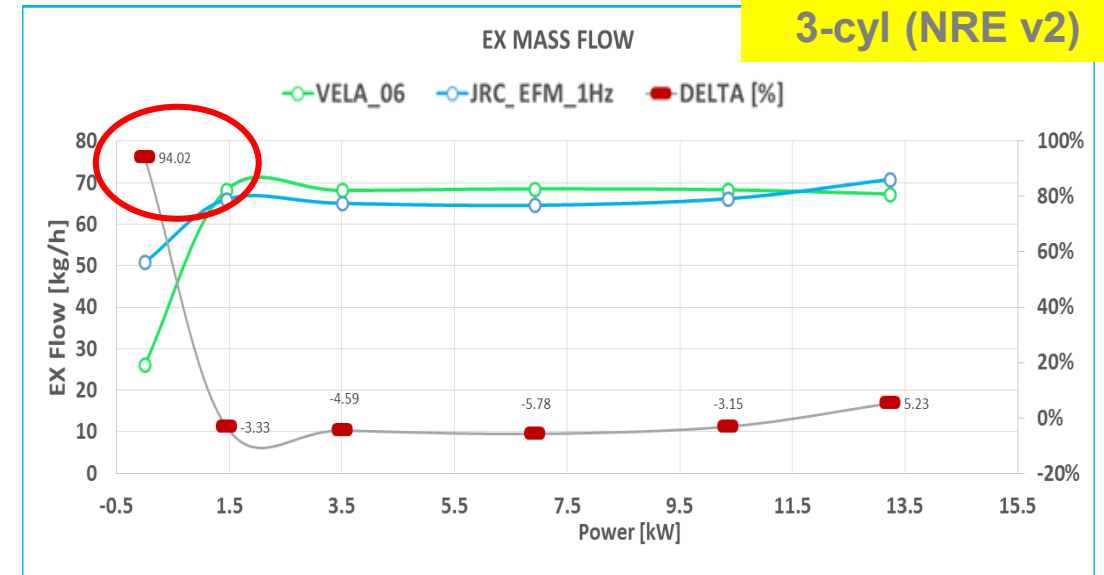

Measurement of emissions – EFM readings


Sensitivity study: A large uncertainty in the EFM translates into a reasonable error in the final CF because the use of the CO₂MAW rather than Work MAW

$$CF = \frac{CF_I}{CF_C}$$

$CF_I = \frac{m}{m_{CO_2}(t_{2,i}) - m_{CO_2}(t_{1,i})}$ (in service ratio)


$CF_C = \frac{m_L}{m_{CO_2,ref}}$ (certification ratio)

CF NOx+THC (VALID-INVALID algorithm)

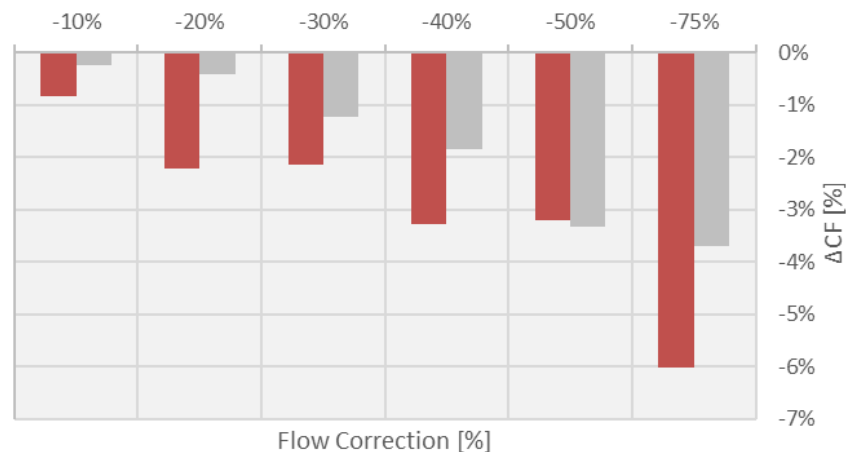

Machinery F details

CF NOx+THC (VALID-INVALID algorithm)
MACHINERY F (667cc)

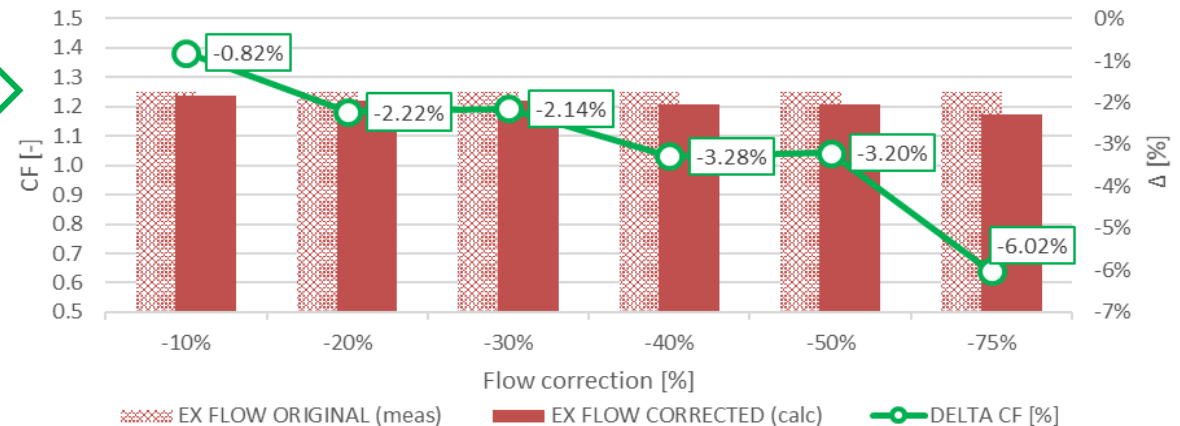

Using CO2MAW method

Testing below 0°C (impact in battery duration)


Performing an ISM test at ambient temperature below 0°C, a minimum of one reference work/reference CO2 mass (for cycle NRTC/NRSC) for every sequences is not possible because of battery life. Combined data sampling, using stitching method, is allowed. The combined data sampling shall be considered one ISM test.

Additional requirements:

- The operating sequences shall be joined in a chronological order (including all data not excluded);
- The different operating sequences shall be obtained using the same NRMM and engine;
- Maximum of **three** operating sequences, except in the case of ISM testing performed at 0°C degrees or below (maximum of **six** operating sequences);
- 72 hours is the maximum elapsing period permitted between the first and last operating sequence;

Minimum amount of work (kWh) or CO2 mass (g/cycle) for each operating sequence:

GROUP		Tamb >0° C			Tamb <0° C		
		A, C	H	OTHERS	A, C	H	OTHERS
REF CYCLE		Hot-start NRTC	LSI-NRTC	NRSC	Hot-start NRTC	LSI-NRTC	NRSC
NUMBER OF MAX STITCHING SEQUENCES		3	3	3	6	6	6
MIN DURATION OF EVERY SEQUENCE (times ref work or CO2 ref mass)	1st sequence	1	1	1	0.75	0.75	0.75
	n sequence	1	1	1	0.50	0.50	0.50

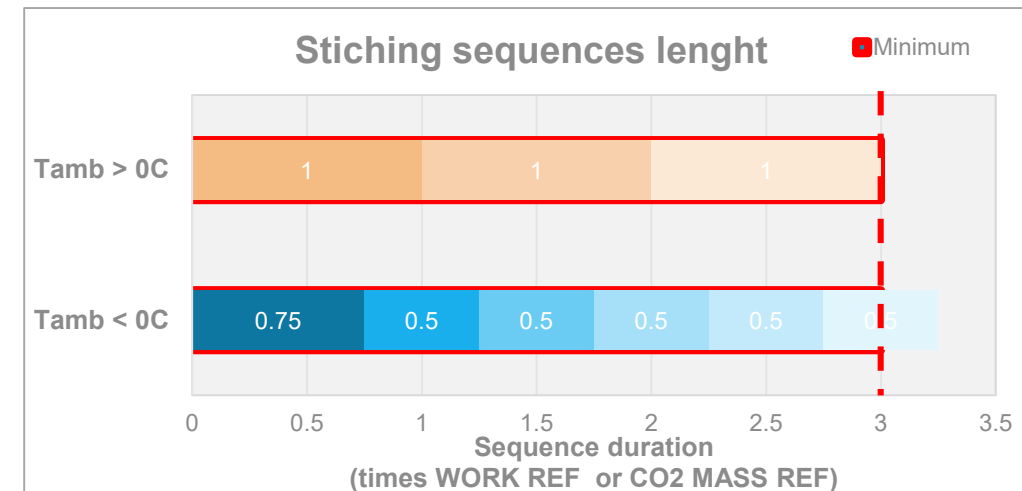


ISM: General methodology & principles

- Use the same principles/methodology (technical requirements) for all categories (except NRSh) and for both variable and constant speed engines.
- The ISM test can be carried out by following the normal/usual operations the NRMM undergoes in the field.
- The test duration will be:
 - ISM groups A , C and H: between 5-7 times the reference work or reference CO₂ (NRTC/ LSI-NRTC)
 - ISM groups E, I, O and P: between 3-5 times the reference work or reference CO₂. Due to the power range of these NRMM engines (this still ensures statistical robustness).
 - All other groups: between 5-7 times the reference work or reference CO₂.

The reference work in kWh or CO₂ reference mass in g/cycle determined from the type-approval test result using the method set out in Appendix 9 (NRSC rather than NRTC)

ISM: Testing scheme

- Two testing schemes for ISM (general):
 - Testing scheme based on the Emission Durability Period (EDP)
 - Testing scheme based on a 4 years' period
- For some categories is possible to use:
 - Testing scheme based on the age of non-road mobile machinery (without an operation hour indicator)
 - Testing scheme based on the odometer reading of non-road mobile machinery (machines with an odometer)
- Small volume manufacturers: the number of engines tested are adapted

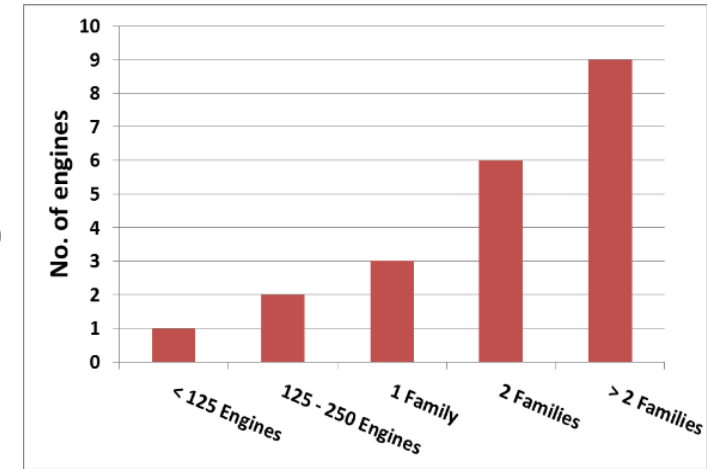

ISM group A

Reference power of selected engine (kW)	% of EDP values	
	a	b
$56 \leq P < 130$	20	55
$130 \leq P \leq 560$	30	70

ISM groups O and P

Group	% of EDP values	
	a	b
O	20	55
P	30	70

Other ISM groups

Reference power of selected engine (kW)	% of EDP values	
	c	d
$P < 56$	10	40
$56 \leq P < 130$	20	55
$P \geq 130$	30	70



Closing remarks

- PEMS is suitable for performing ISM measurements in all NRMM engine (sub-) category (except for NRSh & NRS-vr-1a and NRS-vi-1a).
- The experience obtained in the Pilot Programs has been translated into the new text amending the ISM regulation.
- Remains for some mfrs. concerns on the accuracy of PEMS measurements, in particular related EFM reading.
- ISM measurements* made by some manufactures confirms the suitability & robustness of the procedure.

**On diverse engine categories within the $56 \leq P \leq 560$ kW and outside that range.*

Keep in touch



EU Science Hub: ec.europa.eu/jrc



@EU_ScienceHub



EU Science Hub – Joint Research Centre



EU Science, Research and Innovation



Eu Science Hub

Thank you



© European Union 2022

Unless otherwise noted the reuse of this presentation is authorised under the [CC BY 4.0](https://creativecommons.org/licenses/by/4.0/) license. For any use or reproduction of elements that are not owned by the EU, permission may need to be sought directly from the respective right holders.